



**CALIFORNIA AIR TOOLS 10020DC-22060 10 Gallon 2.0 Hp Ultra Quiet & Oil-Free With 80% Air Dryer and Aftercooler Air Compressor**

**2.0 HP (Rated/Running)**


**10 Gallon Steel Tank**

**6.40 CFM @ 40 PSI**

**5.30 CFM @ 90 PSI**

**80% Air Drying System**

The CALIFORNIA AIR TOOLS 10020DC-22060 Ultra Quiet & Oil-Free Air Compressor is designed to be one of the quietest 2.0 Hp air compressors in the industry having only 70 decibels of sound.

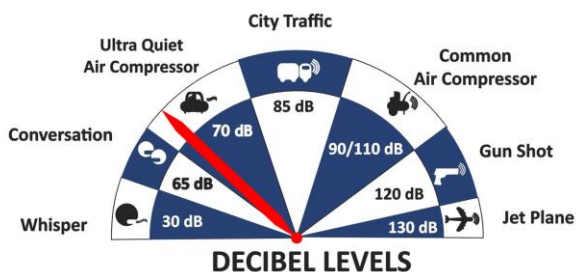

The powerful 2.0 HP motor operates at only 1680 RPM creating less noise, vibration and creating less wear.

**ULTRA QUIET**

**ONLY 70 DB NOISE LEVEL**

The Oil-Free Dual Piston Pump System is engineered for longevity, high performance, and durability.

The SP-9421 Motor/Pump is tested for a minimum pump life of 3000 hours before service. 30% more life before repair.

The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times. \*

The large 10.0-gallon steel air tank is only 91 lbs.

This air compressor is ideal for anyone working inside (office, shop, store, warehouse, or home) where noise is a major issue.


## 80% AIR DRYER SYSTEM

The 80% Air Dryer is specially designed to remove water vapor from the air to protect sensitive tools and machinery.

To dry the air from the air compressor an Aftercooler and 80% Air Dryer are utilized.

The aftercooler is a heat exchanger for cooling the discharge air from the air compressor. The water vapor from the compressed air is condensed into liquid form and pushed into the Air Dryer.

Desiccant is contained within mesh bag inside 80% Air Dryer Tower

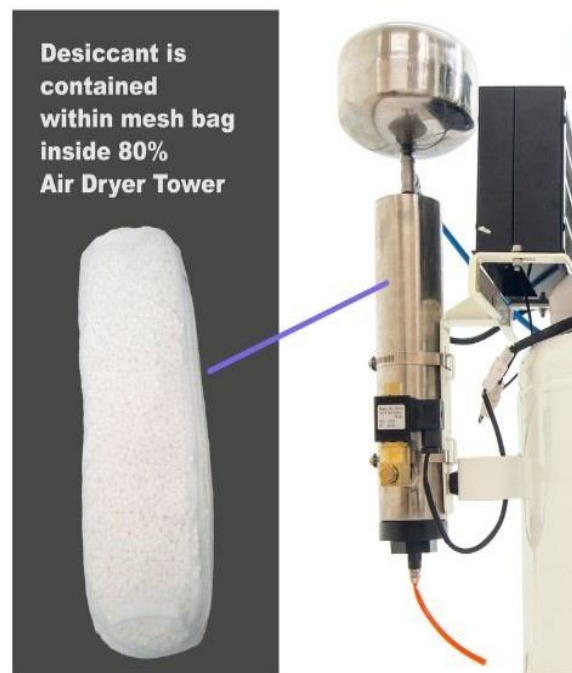



Ultra-Quiet Motor/Pump - Only 70 Decibels


Ultra-Quiet Motor/Pump  
Long Life Design Pump  
Teflon Cylinder Rings  
Stainless Reed Valves

Regulated Pressure Gauge  
Air Pressure Regulator Knob  
Tank Pressure Gauge

Industrial "Push to Connect" Quick Connectors

80% Air Drying System  
Replaceable Desiccant

Easy Drain Ball Valve

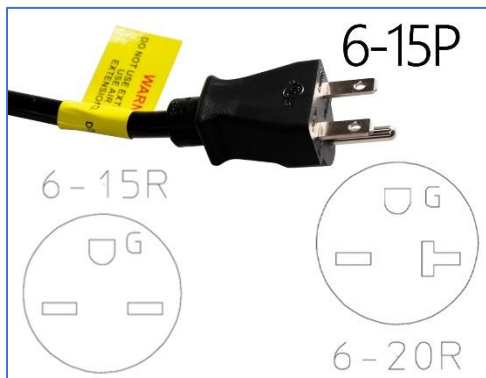

---

## FEATURES

- \* **Ultra Quiet** - Only 70 decibels
- \* Oil-Free Pump - Cleaner air for better tool operation.  
Less maintenance and Costs.
- \* Two pressure control gauges
- \* One - Female industrial "Push to Connect" quick connector
- \* Thermal Overload Protector
- \* 125 PSI Maximum Pressure
- \* Kick On Pressure 95 PSI - Kick Off Pressure 125 PSI
- \* 220v / 60 Hz / (No 208 Volts)
- \* Low Amp Draw - Only 7.0 Amps
- \* Tank fill rate from empty to full - 130 Seconds
- \* Recovery time from 95 PSI to 125 PSI - 40 Seconds
- \* Duty Cycle - 70/30\*
- \* Plug Type: Nema 6-15P
- \* L (16") x W (23") x H (35")
- \* 91 pounds
- \* Non-ASME Air Tank
- \* Air Dryer - Includes Activated Alumina desiccant with a 4000-hour life.  
Activated Alumina is used in air prepurification (due to its high water and carbon dioxide adsorption capacity) and adsorption of sulphur compounds.
- \* Aftercooler (condenser)
- \* Commercial Use: Refer to State & City Codes
- \* 1 Year Limited Warranty
- \* Assembled in USA with global components

For more information and to watch a 10020DC-22060 product demonstration please visit California Air Tools: <https://www.californiaairtools.com/air-dryer-ultra-quiet-oil-free-air-compressors/cat-10020dc-22060/>

*Manufactured in Mexico using global components.*

*MODEL: 10020DC-22060*

*PART NUMBER: CAT-10020DC-22060*

*[www.californiaairtools.com](http://www.californiaairtools.com)*

*Revision A: 07-2024*