

CALIFORNIA AIR TOOLS 20040SPCAD Ultra Quiet and Oil-Free 4.0 Hp Air Compressor in Soundproof Cabinet with Auto Drain Valve



20 Gallon

4 HP Motor

125 PSI MAX

10.6 CFM @90PSI

65 Decibels

Automatic Drain Valve

4.0 HP
(Rated/Running)

20.0 Gallon Steel
Tank

12.80 CFM @ 40 PSI

10.60 CFM @ 90 PSI

The CALIFORNIA AIR TOOLS 20040SPCAD Ultra Quiet & Oil-Free Air Compressor in Soundproof Cabinet is designed to be one of the quietest 4.0 Hp air compressors in the industry having only 65 decibels of sound.

65 Decibels

4 Hp Oil-Free Dual-Piston Long-Life Motor Pump

Tank Pressure Gauge

Regulated Pressure Gauge


Output Pressure Regulator

20 Gallon Air Tank with Auto Drain Valve in Sound Proof Cabinet

Female Industrial Quick Connect

230 lbs
220 Volts
14 Amps



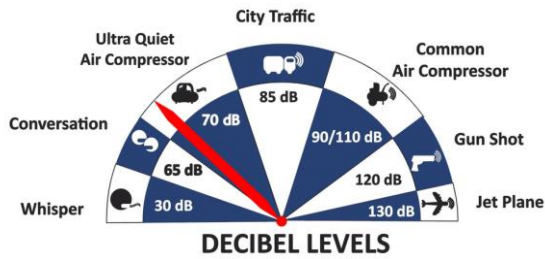

The powerful Twin 2.0 HP motor operates at only 1680 RPM creating less noise, vibration and creating less wear.

ULTRA QUIET

ONLY 58 DB NOISE LEVEL

The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times. *

The Oil-Free Dual Piston Pump System is engineered for high performance and durability.

The CAT-20040SPCAD Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours.

The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

SOUNDPROOF CABINET

The cabinet has two latching doors that allow for easy access to the compressor and components.



The two cabinet exhaust fans are used to remove the air from the cabinet to a cool working condition for the air compressor.

The 4 caster wheels makes moving the air compressor from location to location very easy.

The Soundproof Cabinet is made of a sturdy metal frame with 1/4" Acoustic Sound Proofing Foam insulation to reduce the noise by 30%.



Easy Start
Valve

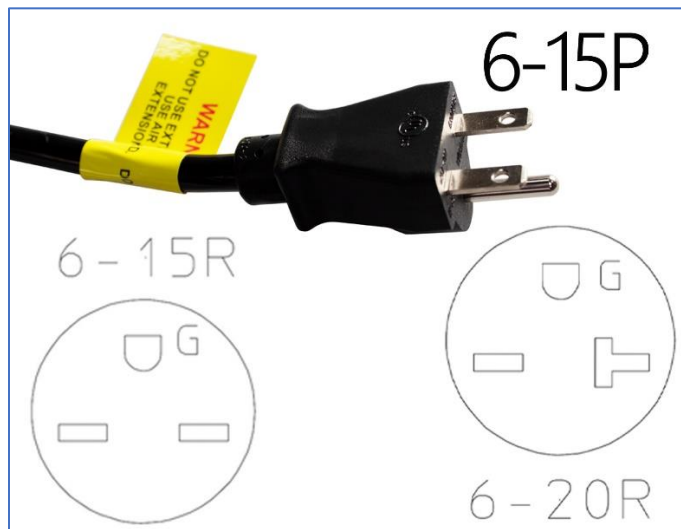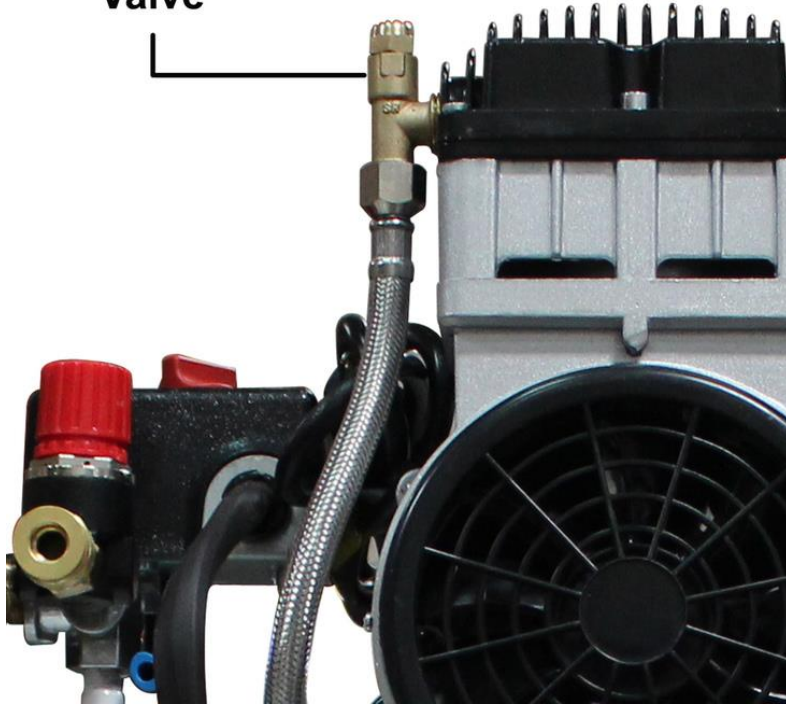

FEATURES

- * **Ultra Quiet - Only 65 decibels**
- * Oil-Free Pump - Cleaner air for better tool operation.
Less maintenance and Costs.
- * Two pressure control gauges
- * One - Female industrial "Push to Connect" quick connector
- * Easy Start Valve - For Less Starting Amperage
- * Condor Pressure Switch
- * Thermal Overload Protector
- * 125 PSI Maximum Pressure
- * 220v / 60 hz / Single Phase - (No 208 Volts - if necessary, obtain 208 to 220 voltage booster)
- * Low Amp Draw - 14 Amps
- * Time to fill tank from empty to full - 150 Seconds
- * Recovery time from 95 PSI to 125 PSI - 40 Seconds
- * Duty Cycle - 70/30*
- * Less heat which dissipates more efficiently.
- * 20 Gal. Steel Air Tank with Soundproof Cabinet and Swivel Caster wheels
- * L (19") x W (38") x H (33")
- * 230 lbs
- * Comes complete (4) Air Filters
- * Plug Type: Nema 6-15P (fits Nema 6-15R or 6-20R receptacle)
- * EZ-1-2321 Auto Drain Valve Factory Installed
- * 1 Year Limited Warranty
- * Commercial Use: Refer to State & City Codes
- * Non-ASME Air Tank
- * Assembled in USA with global components

For more information and to watch a 20040SPCAD product demonstration please visit California Air Tools:

<https://www.californiaairtools.com/sound-proof-cabinet-ultra-quiet-air-compressors/cat-20040spcad/>

Manufactured in Mexico using global components.

MODEL: 20040SPCAD

PART NUMBER: CAT-20040SPCAD

www.californiaairtools.com

Revision A: 07-2024