



CALIFORNIA AIR TOOLS 10020DSPC 10 Gal. Powerful 2.0 Hp Ultra Quiet & Oil-Free with 80% Air Dryer and Aftercooler in a Soundproof Cabinet

10 Gallon

2 HP Motor

130 PSI MAX

5.3 CFM @90PSI

58 Decibels

80% Dry Air



2.0 HP (Rated/Running)

10 Gallon Steel Tank

6.40 CFM @ 40 PSI

5.30 CFM @ 90 PSI

80% Air Drying System

The CALIFORNIA AIR TOOLS 10020DSPC Ultra Quiet & Oil-Free Air Compressor is designed to be one of the quietest 2.0 Hp air compressors in the industry having only 58 decibels of sound.

58 Decibels


2 Hp Oil-Free Dual-Piston Long-Life Motor-Pump

Tank Pressure Gauge

Regulated Pressure Gauge


Pressure Regulator Knob

Industrial Female Quick Connect



10 Gallon Steel Air Tank with Air Dryer in Sound-Proof Cabinet

145 lbs. 110 Volts, 15 Amps

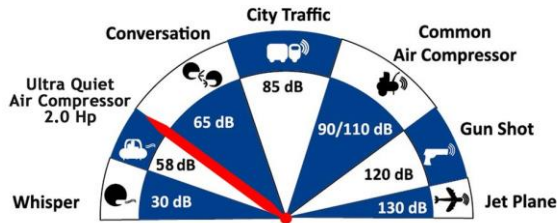

The powerful 2.0 HP motor operates at only 1680 RPM creating less noise, vibration and creating less wear.

ULTRA QUIET

ONLY 58 DB NOISE LEVEL

The Oil-Free Dual Piston Pump System is engineered for longevity, high performance, and durability.

The SP-9421 Motor/Pump is tested for a minimum pump life of 3000 hours before service. 30% more life before repair.

The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times. *

Large 10.0-gallon steel air tank.


This air compressor is ideal for anyone working inside (office, shop, store, warehouse, or home) where noise is a major issue.

80% AIR DRYER SYSTEM


The 80% Air Dryer is specially designed to remove water vapor from the air to protect sensitive tools and machinery.

To dry the air from the air compressor an Aftercooler and 80% Air Dryer are utilized.

The aftercooler is a heat exchanger for cooling the discharge air from the air compressor. The water vapor from the compressed air is condensed into liquid form and pushed into the Air Dryer.

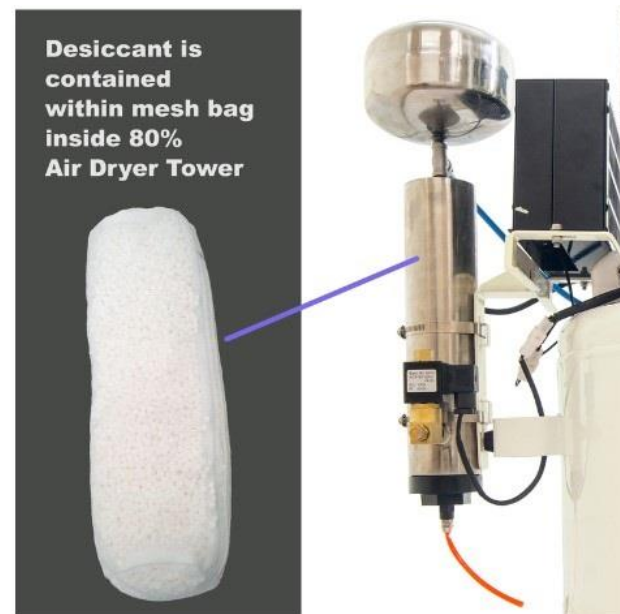

FEATURES

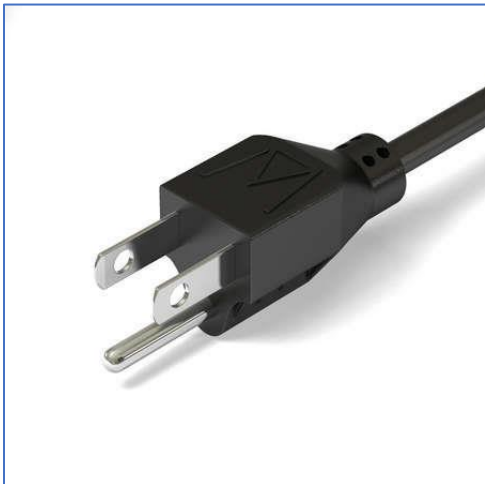



- * **Ultra Quiet** - Only **58 decibels**
- * Oil-Free Pump - Cleaner air for better tool operation.
Less maintenance and Costs.
- * Two pressure control gauges
- * One - Female industrial "Push to Connect" quick connector
- * Thermal Overload Protector
- * 130 PSI Maximum Pressure
- * Kick On Pressure 100 PSI - Kick Off Pressure 130 PSI
- * 110v / 60 Hz
- * Low Amp Draw - Only 14.0 Amps
- * Tank fill rate from empty to full - 130 Seconds
- * Recovery time from 100 PSI to 130 PSI - 40 Seconds
- * Duty Cycle - 70/30*
- * L (26") x W (30") x H (39.5")
- * 221 pounds
- * Air Dryer - Includes Activated Alumina desiccant with a 4000-hour life.
Activated Alumina is used in air prepurification (due to its high water and carbon dioxide adsorption capacity) and adsorption of sulphur compounds.
- * Aftercooler (condenser)
- * Commercial Use: Refer to State & City Codes
- * Non-ASME Air Tank
- * 1 Year Limited Warranty
- * Assembled in USA

For more information and to watch a 10020DSPC product demonstration please visit California Air Tools:

<https://www.californiaairtools.com/air-dryer-ultra-quiet-oil-free-air-compressors/cat-10020dspc/>

Manufactured in Mexico using global components.

MODEL: 10020DSPC

PART NUMBER: CAT-10020DSPC

www.californiaairtools.com

Revision A: 07-2024