



Category: Air Compressor
UPC: 850004451434

10 Gallon
2 HP Motor
125 PSI MAX
5.3 CFM @90PSI
70 Decibels
98% Dry Air




SPECIFICATION SHEET

Model: 10020HDCADC

PRODUCT OVERVIEW

The CALIFORNIA AIR TOOLS 10020HDCADC Ultra Quiet, Ultra Dry Oil-Free Air Compressor with Air Drying System is designed to be one of the quietest 2.0 Hp air compressors in the industry having only 70 decibels of sound. The Powerful 2.0 HP motor operates at only 1680 RPM creating less noise and less wear.

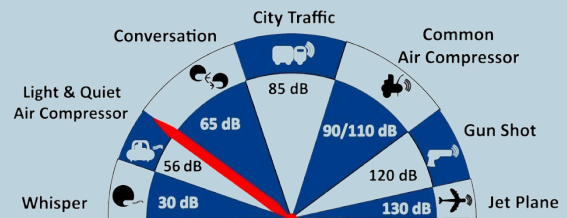


FEATURES

- The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times.
- The Oil-Free Dual Piston Pump System is engineered for high performance and durability.
- The CAT-10020HDCADC Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours.
- The Oil-Free pump allows for use in a variety of temperatures (cold starts) and eliminates oil from being in the air.

SPECIFICATIONS AND PERFORMANCE



POWERFUL ULTRA QUIET & OIL-FREE AIR COMPRESSOR WITH 98% AIR DRYING SYSTEM AND AUTOMATIC DRAIN VALVE

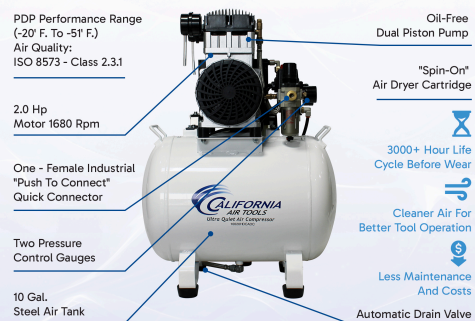

ISO 8573 - Class 2.3.1 Compliant

BENEFITS

The large 10 Gallon Horizontal Steel Air Tank is just the right size to fit under a bench, desk or cabinet.

The Air Dryer is specially designed to remove up to 98% of the water vapor from the air to protect sensitive tools and machinery. To dry the air from the air compressor an Aftercooler and 98% Air Dryer are utilized.

The aftercooler is a heat exchanger for cooling the discharge air from the air compressor. The water vapor from the compressed air is condensed into liquid form and pushed into the Air Dryer.

The easy to replace "Spin-On" Air Drer Cartridge has a regenerating High-Temperature Molecular Sieve Desiccant to dry the air. This Ultra Dry cartridge dryer has a life of 2-years before replacement.

The California Air Tools EZ-1 Automatic Drain Valve has been designed to eliminate manually draining your air compressor air tank.

The manually set timer allows you to set the time for both the frequency and duration of the draining process.

The Easy Start Valve feature allows for a easier start up using less starting amps. The Easy Start Valve releases a small amount of air from the pump at start up to produce a no-load condition allowing the motor to spin freely. This no-load start up requires less amps for a easier start up in cold temperatures.

Designed for the person looking for Power, 98% Dry Air with Low Dew Point Air Flow and Less Service with at Least 30% Less Noise! Ideal for Dental, Milling, Surgical, Manufacturing Clean Rooms, Restaurant and General Engineering Applications.

SPECIFICATIONS

Specification	Details
Material	Alloy Steel
Color	White
Weight	100 Pounds
Height	26 inches
Item Dimensions L x W x H	20"L x 28"W x 26"H
Capacity	10 Gallons
Maximum Current	10 Gallons
Voltage	110 Volts
Noise Level	70 dB

FEATURES

1. **Ultra Quiet – Only 70 decibels**
2. Oil-Free Pump (Class 1) – Cleaner air for better tool operation.
3. Less maintenance and Costs.
4. Two pressure control gauges
5. Easy Start Valve – For Less Starting Amperage
6. One – Female industrial “Push to Connect” quick connector
7. 0.01 Micron Prefilter
8. 5.0 Micron (Class 2) Air Filter & Regulator
9. Condor Pressure Switch
10. Thermal Overload Protector
11. 125 PSI Maximum Pressure
12. 110 Volts / 60 Hertz / Single Phase
13. Low Amp Draw – 14 Amps
14. Time to fill tank from empty to full – 120 Seconds
15. Recovery time from 95 PSI to 125 PSI – 25 Seconds
16. Duty Cycle – 70/30*
17. Less heat which dissipates more efficiently
18. 10 Gallon Steel Air Tank for Commercial use.
19. L (20”) x W/D (28”) x H (26”)
20. 100 lbs
21. Air Dryer Cartridge uses a High-Temperature Molecular Sieve Desiccant
22. Easy to remove (spin off) and replace every 2 years
23. Aftercooler (condenser)
24. PDP performance range (-20° F. to -51° F.)
25. Air Quality: ISO 8573 – Class 2.3.1
26. EZ-1-2321 Auto Drain Valve Factory Installed
27. 1 Year Limited Warranty
28. Comes complete (2) Air Filters
29. Commercial Use: Refer to State & City Codes
30. Non-ASME Air Tank
31. Assembled in USA with global components

Product Overview:

🌐 CALIFORNIA AIR TOOLS 10020HDCADC Powerful 2.0 Hp Ultra Quiet, Ultra Dry & Oil-Free ...

COMPATIBLE ACCESSORIES

- 8mm PTFE Black Hose Tubing (10 feet long) to connect to Automatic Drain Valve
- 16 Piece Air Hose & Air Tool Accessory Kit (CAT-376)
- California Air Tools Hybrider Flex 1/4in 25 Foot Hybrid Air Hose

70 DECIBELS

**2 Hp Oil-Free
Dual-Piston
Long-Life
Motor-Pump**

**100 lbs. 110 Volts,
15 Amps**

Regulated Pressure
Gauge


Output Pressure
Regulator

Tank Pressure
Gauge

Industrial Female
Quick Connect

**10 Gallon Steel
Air Tank**

Air Drying System



Part Number	CAT- 10020HDCADC
UPC	850004451434
Shipping Dimensions	48"L x 40"W x38"H
Shipping Weight	166 lbs
Shipping Class	85
Ship Type	LTL
Cage Code	7VRJ0
HTSUS	8414.80.1685
Country of Origin	USA

CALIFORNIA AIR TOOLS | 8560 Siempre Viva Rd, San Diego, CA 92154, USA | (866) 409-4581 | info@californiaairtools.com