



Category: Contractor Grade Air Compressor
UPC: 743369710035

10	Gallon
2	HP Motor
125	PSI MAX
5.3	CFM @90PSI
70	Decibels




SPECIFICATION SHEET

Model: 10020C

PRODUCT OVERVIEW

The CALIFORNIA AIR TOOLS 10020C Ultra Quiet & Oil-Free Air Compressor is designed to be one of the quietest 2.0 Hp air compressors in the industry having only 70 decibels of sound.

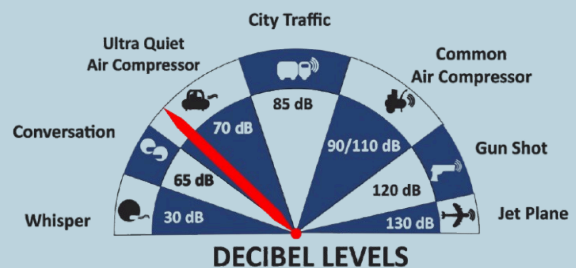

FEATURES

- The Powerful 2.0 HP (SP-9421) motor operates at only 1680 RPM creating less noise and less wear.
- The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times.
- The Oil-Free Dual Piston Pump System is engineered for high performance and durability.

SPECIFICATIONS AND PERFORMANCE



Weight 82.5 Pounds	Noise Level 70 Decibels	Maximum Pressure 125 PSI
Voltage 110V / 60 Hz	Low Amp Draw 14 Amps	



ULTRA QUIET & OIL-FREE AIR COMPRESSOR



BENEFITS

The CAT-20020AD Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours compared to other comparable air compressors with life cycles of 500 hours or less. The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

The Easy Start Valve feature allows for a easier start up using less starting amps. The Easy Start Valve releases a small amount of air from the pump at start up to produce a no-load condition allowing the motor to spin freely. This no-load start up requires less amps for a easier start up in cold temperatures.

The large 20 Gallon Steel Air Tank is designed to store more air for higher demand air tools such as spray guns and sanders. Prefect for the shop or garage.

SPECIFICATIONS

Specification	Details
Material	Steel
Color	Silver
Weight	82.5 Pounds
Height	36 inches
Item Dimensions L x W x H	16"L x 15.1"W x 36"H
Capacity	10 Gallons
Maximum Current	14 Amps
Voltage	110 Volts
Noise Level	70 dB

FEATURES

1. **Ultra Quiet – Only 70 decibels**
2. Oil-Free Pump – Cleaner air for better tool operation. Less maintenance and Costs.
3. Two pressure control gauges
4. Two – Female industrial “Push to Connect” quick connectors
5. Easy Start Valve – For Less Starting Amperage
6. Pressure Switch
7. Thermal Overload Protector
8. 125 PSI Maximum Pressure
9. 110v / 60 hz
10. Low Amp Draw – 14 Amps
11. Dedicated 15 amp outlet -14 gauge 25ft cord – Min. 5500 Watt Generator
12. Time to fill tank from empty to full – 4.00 Minutes
13. Recovery time from 95 PSI to 125 PSI -1.00 Minute

14. Duty Cycle – 70/30*
15. Less heat which dissipates more efficiently
16. 20 Gal. Steel Air Tank with Automatic Drain Valve
17. Wheel Kit (no flat) and (2) Air Filters
18. L (20") x W/D (23") x H (45"),
19. Weight: 115 lbs
20. Non-ASME Air Tank
21. 1 Year Limited Warranty
22. Commercial Use: Refer to State & City Codes
23. Assembled in USA with global components

Product Overview:

[California Air Tools 10020C Website](#)

COMPATIBLE ACCESSORIES

- 16 Piece Air Hose & Air Tool Accessory Kit (CAT-376)
- California Air Tools Hybrider Flex 1/4in 25 Foot Hybrid Air Hose
- Refrigerated 98% Air Dryer, RD-91502, 110v 60hz
- EZ2321ADL Automatic Drain Valve Long Extension Kit (110v 60 hz)



Part Number	CAT-10020C
UPC	743369710035
Shipping Dimensions	17.71"L x 21.45"W x 45"H
Shipping Weight	93 lbs
Shipping Class	85
Ship Type	Parcel
Cage Code	7VRJ0
HTSUS	8414.80.1685
Country of Origin	CHINA