



Category: Contractor Grade Air Compressor
UPC: 850004451694

20	Gallon
2	HP Motor
125	PSI MAX
5.0	CFM @90PSI
77	Decibels




SPECIFICATION SHEET

Model: 20020CR

PRODUCT OVERVIEW

The CALIFORNIA AIR TOOLS 20020CR Ultra Quiet & Oil-Free Continuous (100% Duty Cycle) 2.0 Hp Air Compressor is designed to be one of the quietest air compressors in the industry having only 77 decibels of sound.

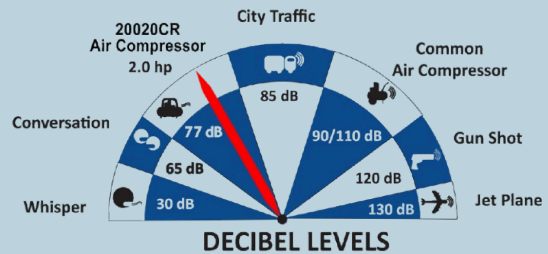

FEATURES

- The Powerful "New" 200CR, 2.0 hp motor/pump operates at only 1700 RPM creating less noise and less wear.
- CONTINUOUS RUNNING UP TO 8 HOURS AT 90 PSI AND 12 HOURS AT 40 PSI OR BELOW.
- The Oil-Free Dual Head Piston Pump System with Teflon Coated Piston Rings is engineered for high performance and durability.

77 Decibels

2 HP Oil-Free Continuous Motor-Pump

Tank Pressure Gauge

Pressure Regulator Knob

Regulated Pressure Gauge

Industrial Push to Connect Female Quick Connectors

20 Gallon Steel Air Tank

114 lbs

110 Volts

14 Amps

California Air Tools 20020CR Ultra Quiet, Oil-Free & Continuous Run

Air Tank & Regulated Pressure Gauges

Powerful 2.0 Hp Oil-Free & Continuous Motor/Pump

Ultra Quiet Only 77 Decibels

Industrial Push to Connect Female Quick Connectors

Industrial Grade Pressure Switch

Large 20 Gallon Steel Air Tank

No Flat Wheels

BENEFITS

The CAT-20020CR Air Compressor has a Oil-Free Piston pump designed to have a life cycle before wear of 5000 hours of usage. Wear parts can be a piston ring, cylinder ring or reed valve.

The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

The large 20-gallon steel air tank with no flat wheels is just the right size for a shop, warehouse, or factory.

Designed for people looking for Oil-Free Continuous Air Flow with at Least 30% Less Noise!

SPECIFICATIONS

Specification	Details
Material	Stainless Steel
Color	Silver
Weight	114 Pounds
Heigh	45 inches
Item Dimensions L x W x H	20"L x 20"W x 45"H
Capacity	20 Gallons
Maximum Current	14 Amps
Voltage	110 Volts
Noise Level	77 dB

FEATURES

1. **Ultra Quiet – Only 77 decibels**
2. Oil-Free Pump – Cleaner air for better tool operation.
3. Less maintenance and Costs.
4. Two pressure control gauges
5. Two – Female industrial “Push to Connect” quick connectors
6. Condor Pressure Switch
7. Thermal Overload Protector
8. 125 PSI Maximum Pressure
9. 110 Volt / 60 Hertz / Single Phase
10. Amp Draw – 14 Amps
11. Power Requirements:
12. Dedicated 15-amp outlet.
13. 3000-Watt (running) Generator
14. Extension Cord: 14-gauge 100ft cord

15. GFCI – Ok
16. Maximum Operating (ambient)
17. Temperatures: 0 to 50°C (32 to 122°F)
18. Time to fill tank from empty to full – 4.00 minutes
19. Recovery time from 90 PSI to 125 PSI – 40 Seconds
20. Up to 8 hours of continuous running at 90 PSI
21. 20 Gal. Steel Air Tank * L (20") x W/D (20") x H (45"),
22. Weight: 114 lbs * Non-ASME Air Tank
23. Commercial Use: Refer to State & City Codes
24. 1 Year Limited Warranty
25. Motor-Pump Made in USA
26. Assembled in USA with global components

Product Overview:

[California Air Tools 20020CR Website](#)

COMPATIBLE ACCESSORIES

- 16 Piece Air Hose & Air Tool Accessory Kit (CAT-376)
- California Air Tools Hybrider Flex 1/4in 25 Foot Hybrid Air Hose
- 317 Water (moisture) & Oil Separator Air Filter 1/4 NPT



Part Number	CAT- 20020CR
UPC	850004451694
Shipping Dimensions	21"L x 21"W x 50"H
Shipping Weight	133 lbs
Shipping Class	85
Ship Type	SMALL PARCEL
Cage Code	7VRJ0
HTSUS	8414.80.1685
Country of Origin	USA