



Category: Contractor Grade Air Compressor
UPC: 850053943270

20	Gallon
1.5	HP Motor
135	PSI MAX
2.9	CFM @90PSI
70	Decibels




Working Pressure 105-135 PSI

SPECIFICATION SHEET

Model: 20015

PRODUCT OVERVIEW

The CALIFORNIA AIR TOOLS 20015 **Ultra Quiet** & Oil-Free 20-Gallon Air Compressor is designed to be one of the quietest 1.5 Hp air compressors in the industry having only 70 decibels of sound.

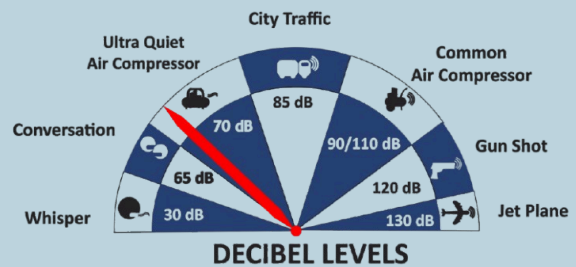

FEATURES

- The Oil-Free Dual Piston Pump System is engineered for high performance and durability.
- The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

SPECIFICATIONS AND PERFORMANCE



Weight
89 Pounds

Noise Level
70 Decibels

Maximum Pressure
135 PSI

Voltage
110V / 60 Hz

Low Amp Draw
13 Amps



ULTRA QUIET & OIL-FREE AIR COMPRESSOR



BENEFITS

The large 20 Gallon Steel Air Tank is designed to store more air for higher demand air tools such as spray guns and sanders. Prefect for the shop or garage.

The 2 (no flat) wheels and handle makes moving this air compressor very easy. Designed for the person looking for Power, Air Flow, Less Service and Maintenance with at Least 25% Less Noise.

SPECIFICATIONS

Specification	Details
Material	Alloy Steel
Color	Silver
Weight	89 Pounds
Height	45.25 inches
Item Dimensions L x W x H	17"L x 19.25"W x 45.25"H
Capacity	20 Gallons
Maximum Current	13 Amps
Voltage	110 Volts
Noise Level	70 dB

FEATURES

1. **Ultra Quiet – Only 70 decibels**
2. Oil-Free Pump – Cleaner air for better tool operation. Less maintenance and Costs.
3. Two pressure control gauges
4. Two – Female industrial “Push to Connect” quick connectors
5. Easy-to-Use Start/Stop Switch
6. Auto Pressure Switch
7. Working Pressure 105-135 PSI (+/-5 PSI)
8. 135 PSI Maximum Pressure
9. Output Air Pressure Regulator (adjustable from 0-105 PSI)
10. Thermal Overload Protector
11. Safety Relief Valve opens at 150 PSI
12. 110v / 60 hz
13. Low Amp Draw – 13 Amps
14. Dedicated 15 amp outlet -14 gauge 25ft cord – Min. 5000 Watt Generator
15. Time to fill tank from empty to full – 6.50 Minutes
16. Recovery time from 95 PSI to 125 PSI -1.8 Minutes
17. Duty Cycle – 70/30*
18. Maximum continuous running 60 min. (Depending PSI & CFM)
19. Less heat which dissipates more efficiently
20. 20 Gal. Steel Air Tank

21. Wheel Kit (no flat) and (2) Air Filters
22. L (17.0") x W/D (19.25") x H (45.25"),
23. Weight: 89 lbs
24. Non-ASME Air Tank
25. 1 Year Limited Warranty
26. Commercial Use: Refer to State & City Codes
27. Manufactured in China

Product Overview:

[California Air Tools 20015 Website](#)

COMPATIBLE ACCESSORIES

- 16 Piece Air Hose & Air Tool Accessory Kit (CAT-376)
- California Air Tools Hybrider Flex 1/4in 25 Foot Hybrid Air Hose
- 317 Water (moisture) & Oil Separator Air Filter 1/4" NPT
- Refrigerated 98% Air Dryer, RD-91502, 110v 60hz



Part Number	CAT-20015
UPC	850053943270
Shipping Dimensions	17.71"L x 21.45"W x 45"H
Shipping Weight	100 lbs
Shipping Class	85
Ship Type	Parcel
Cage Code	7VRJ0
HTSUS	8414.80.1685
Country of Origin	CHINA