



Category: Contractor Grade Air Compressor
UPC: 743369740223

4.6 Gallon
2 HP Motor
125 PSI MAX
5.3 CFM @90PSI
70 Decibels




SPECIFICATION SHEET

Model: 4620AC-22060

PRODUCT OVERVIEW

The CALIFORNIA AIR TOOLS 4620AC-22060 (220 volts, 60hz) Ultra Quiet & Oil-Free Air Compressor is designed to be one of the quietest 2.0 Hp air compressors in the industry having only 70 decibels of sound.

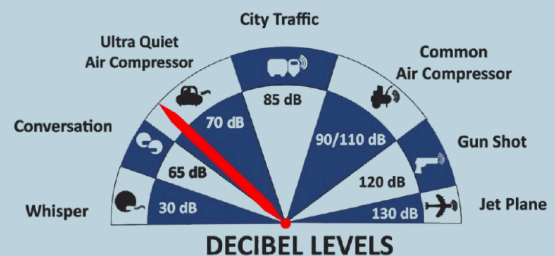

FEATURES

- The Powerful 2.0 HP (SP-9421-22060) motor operates at only 1680 RPM creating less noise and less wear. The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times. *The Oil-Free Dual Piston Pump System is engineered for high performance and durability.

SPECIFICATIONS AND PERFORMANCE



POWERFUL ULTRA QUIET & OIL-FREE AIR COMPRESSOR



BENEFITS

The CAT-4620AC-22060 Air Compressor (220v 60hz) has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours compared to other comparable air compressors with life cycles of 500 hours or less. The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

The Easy Start Valve feature allows for a easier start up using less starting amps. The Easy Start Valve releases a small amount of air from the pump at start up to produce a no-load condition allowing the motor to spin freely. This no-load start up requires less amps for a easier start up in cold temperatures.

The large 4.6 Gallon Aluminum Air Tank is only 64 pounds making it very easy to move around the jobsite. Designed for the person looking for Power, Air Flow, Less Service and Maintenance with at Least 30% Less Noise!

SPECIFICATIONS

Specification	Details
Material	Aluminum Tank
Color	Silver
Weight	Pounds
Heigh	19.7 inches
Item Dimensions L x W x H	18.75"L x 17"W x 19.7"H
Capacity	4.6 Gallons
Maximum Current	7.5 Amps
Voltage	220 Volts
Noise Level	70 dB

FEATURES

1. **Ultra Quiet – Only 70 decibels**
2. Oil-Free Pump – Cleaner air for better tool operation. Less maintenance and Costs.
3. Two pressure control gauges
4. Two – Female industrial “Push to Connect” quick connectors
5. Easy Start Valve – For Less Starting Amperage
6. Thermal Overload Protector
7. 125 PSI Maximum Pressure
8. 220v / 60 hz / Single Phase / (No 208 Volts – if necessary, obtain 208 to 220 voltage booster)
9. Low Amp Draw – 7.5 Amps
10. Generator with 3000 Running Watts
11. Plug Type: Nema 6-15P (fits Nema 6-15R or 6-20R receptacle)
12. Time to fill tank from empty to full – 60 Seconds
13. Recovery time from 95 PSI to 125 PSI – 20 Seconds
14. Duty Cycle – 70/30*

15. Less heat which dissipates more efficiently
16. Portable & Easy to move around.
17. L (18.75") x W/D (17") x H (19.7"),
18. Weight: 64 lbs
19. 1 Year Limited Warranty
20. Comes complete Two Air Filters
21. Assembled in USA
22. Commercial Use: Refer to State & City Codes

Product Overview:

[California Air Tools 4620AC-22060 Website](#)

COMPATIBLE ACCESSORIES

- 16 Piece Air Hose & Air Tool Accessory Kit (CAT-376)
- California Air Tools Hybrider Flex 1/4in 25 Foot Hybrid Air Hose
- 317 Water (moisture) & Oil Separator Air Filter 1/4 NPT



Part Number	CAT- 4620AC-22060
UPC	743369740223
Shipping Dimensions	22"L x 19"W x 24"H
Shipping Weight	75 lbs
Shipping Class	85
Ship Type	SMALL PARCEL
Cage Code	7VRJ0
HTSUS	8414.80.1685
Country of Origin	USA