



Category: Contractor Grade Stationary Air Compressor
UPC: 743369760009

60	Gallon
4	HP Motor
125	PSI MAX
10.6	CFM @90PSI
75	Decibels




SPECIFICATION SHEET

Model: 60040CAD

PRODUCT OVERVIEW

The CALIFORNIA AIR TOOLS 60040CAD **Ultra Quiet & Oil-Free**, 60 Gallon ASME Certified Air Compressor is designed to be one of the quietest 4.0 Hp air compressors in the industry having only 75 decibels of sound.

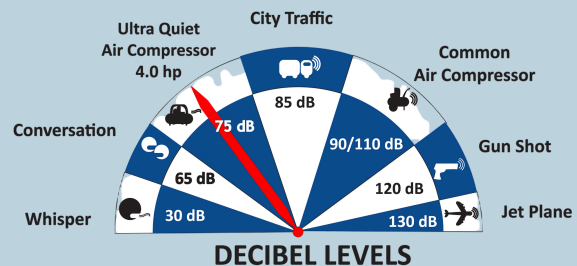

FEATURES

- The Powerful Twin 2.0 HP (SP-9421-22060) motors operates at only 1680 RPM creating less noise and less wear.
- The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times.
- The Oil-Free Dual Piston Pump System is engineered for high performance and durability.
- The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump). The large 60 Gallon Steel ASME Air Tank is just the right size for shop or garage.

SPECIFICATIONS AND PERFORMANCE

21 Inches 28.5 Inches 66 Inches

Weight 213 Pounds	Noise Level 75 Decibels	Maximum Pressure 125 PSI
Voltage 220 Volt / 60 Hertz Single Phase (No 208 Volts)		
Low Amp Draw 14 Amps		

POWERFUL ULTRA QUIET & OIL-FREE STATIONARY AIR COMPRESSOR WITH AUTOMATIC DRAIN VALVE

- Powerful 4 HP Motor (Twin 2.0 HP)
- Power Switch & Tank Pressure Gauge
- Output Pressure Regulator & Pressure Gauge
- Air Hose Port 3/8"
- 5 Micron Air Filter
- 60 Gallon ASME Steel Tank
- Oil-Free Dual Piston Pump
- 3000+ Hour Life Cycle Before Wear
- Cleaner Air For Better Tool Operation
- Less Maintenance And Costs
- Automatic Drain Valve

BENEFITS

The CAT-60040CAD Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours compared to other comparable air compressors with life cycles of 1500 hours or less.

EZ-1-2321 Auto Drain Valve Factory Installed

The California Air Tools EZ-1 Automatic Drain Valve has been designed to eliminate manually draining your air compressor air tank.

The manually set timer allows you to set the time for both the frequency and duration of the draining process. (Factory Pre-Set)

Designed for the person looking for Power, Air Flow and Less Service with at Least 30% Less Noise!

SPECIFICATIONS

Specification	Details
Material	Alloy Steel
Color	Silver
Weight	213 Pounds
Height	66 inches
Item Dimensions L x W x H	21"L x 29"W x 66"H
Capacity	60 Gallons
Maximum Current	14 Amps
Voltage	220 Volts
Noise Level	75 dB

FEATURES

1. **Ultra Quiet – Only 75 decibels**
2. Oil-Free Pump – Cleaner air for better tool operation.
3. Less maintenance and Costs.
4. Two pressure control gauges
5. 5 Micron Air Filter & Regulator with a 3/8" Port
6. Air Hose Port 3/8"
7. Condor Pressure Switch
8. Thermal Overload Protector
9. 125 PSI Maximum Pressure
10. 220 Volt / 60 Hertz / Single Phase – (No 208 Volts)
11. Low Amp Draw – 14 Amps
12. Time to fill tank from empty to full – 6:30 Minutes

13. Recovery time from 95 PSI to 125 PSI – 2:00 Minutes
14. Duty Cycle – 70/30*
15. Less heat which dissipates more efficiently
16. 60 Gal. Steel ASME Air Tank
17. L (21") x W/D (29") x H (66")
18. Weight: 213 lbs
19. EZ-1-2301 Auto Drain Valve Factory Installed
20. The California Air Tools EZ-1 Automatic Drain Valve has been designed to eliminate manually draining your air compressor air tank.
21. Comes complete (4) Air Filters
22. Plug Type: Nema 6-15P (fits Nema 6-15R or 6-20R receptacle)
23. ASME Certified for Commercial Use
24. 1 Year Limited Warranty
25. Commercial Use: Refer to State & City Codes
26. Assembled in USA with global components

Product Overview:

[California Air Tools 60040CAD Website](#)

COMPATIBLE ACCESSORIES

- 16 Piece Air Hose & Air Tool Accessory Kit (CAT-376)
- California Air Tools Hybrider Flex 1/4in 25 Foot Hybrid Air Hose
- 317 Water (moisture) & Oil Separator Air Filter 1/4" NPT



Part Number	CAT-60040CAD
UPC	743369760009
Shipping Dimensions	48"L x 40"W x 77"H
Shipping Weight	307 lbs
Shipping Class	85
Ship Type	Freight
Cage Code	7VRJ0
HTSUS	8414.80.1685
Country of Origin	USA