Category: Contractor Grade Air Compressor
UPC: 743369710035

10 Gallon
2 HP Motor
125 PSI MAX
5.3 CFM @90PSI
70 Decibels




# SPECIFICATION SHEET

# Model: 10020C

## PRODUCT OVERVIEW

The CALIFORNIA AIR TOOLS 10020C Ultra Quiet & Oil-Free Air Compressor is designed to be one of the quietest 2.0 Hp air compressors in the industry having only 70 decibels of sound.

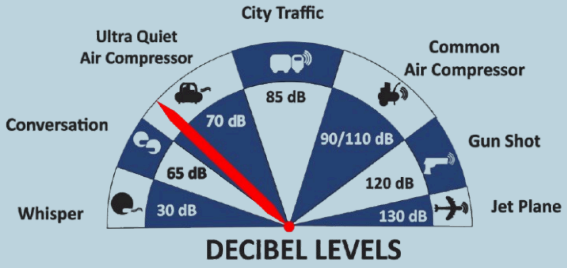


## FEATURES

- The Powerful 2.0 HP (SP-9421) motor operates at only 1680 RPM creating less noise and less wear.
- The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times.
- The Oil-Free Dual Piston Pump System is engineered for high performance and durability.






## BENEFITS

The CAT-20020AD Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours compared to other comparable air compressors with life cycles of 500 hours or less. The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

The Easy Start Valve feature allows for a easier start up using less starting amps. The Easy Start Valve releases a small amount of air from the pump at start up to produce a no-load condition allowing the motor to spin freely. This no-load start up requires less amps for a easier start up in cold temperatures.

The large 20 Gallon Steel Air Tank is designed to store more air for higher demand air tools such as spray guns and sanders. Prefect for the shop or garage.

## SPECIFICATIONS

| Specification | Details |
|---|---|
| Material | Steel |
| Color | Silver |
| Weight | 82.5 Pounds |
| Height | 36 inches |
| Item Dimensions L x W x H | 16"L x 15.1"W x 36"H |
| Capacity | 10 Gallons |
| Maximum Current | 14 Amps |
| Voltage | 110 Volts |
| Noise Level | 70 dB |
| Horsepower | 2.0 Hp |
| CFM 40 PSI | 6.40 |
| CFM  90 PSI | 5.30 |

## FEATURES

1. **Ultra Quiet** – **Only 70 decibels**
2. Oil-Free Pump – Cleaner air for better tool operation. Less maintenance and Costs.
3. Two pressure control gauges
4. Two – Female industrial “Push to Connect” quick connectors
5. Easy Start Valve – For Less Starting Amperage
6. Pressure Switch
7. Thermal Overload Protector
8. 125 PSI Maximum Pressure
9. 110v / 60 hz

10. Low Amp Draw – 14 Amps
11. Dedicated 15 amp outlet -14 gauge 25ft cord – Min. 5500 Watt Generator
12. Time to fill tank from empty to full – 4.00 Minutes
13. Recovery time from 95 PSI to 125 PSI -1.00 Minute
14. Duty Cycle – 70/30*
15. Less heat which dissipates more efficiently
16. 20 Gal. Steel Air Tank with Automatic Drain Valve
17. Wheel Kit (no flat) and (2) Air Filters
18. L (20″) x W/D (23″) x H (45″),
19. Weight: 115 lbs
20. Non-ASME Air Tank
21. 1 Year Limited Warranty
22. Commercial Use: Refer to State & City Codes
23. Assembled in USA with global components

## Product Overview:

[California Air Tools  10020C Website]

## COMPATIBLE ACCESSORIES

- 16 Piece Air Hose & Air Tool Accessory Kit (CAT-376)
- California Air Tools Hybrider Flex 1/4in 25 Foot Hybrid Air Hose
- Refrigerated 98% Air Dryer, RD-91502, 110v 60hz
- EZ2321ADL Automatic Drain Valve Long Extension Kit (110v 60 hz)




| | |
|---|---|
| Part Number | CAT-10020C |
| UPC | 743369710035 |
| Shipping Dimensions | 17.71”L x 21.45"W x 45"H |
| Shipping Weight | 93 lbs |
| Shipping Class | 85 |
| Ship Type | Parcel |
| Cage Code | 7VRJ0 |
| HTSUS | 8414.80.1685 |

| | |
|---|---|
| Country of Origin | CHINA |

CALIFORNIA AIR TOOLS | 8560 Siempre Viva Rd, San Diego, CA 92154, USA | (866) 409-4581 | info@californiaairtools.com