
Category: 80% Air Dryer Series Air Compressor
UPC: 743369710257

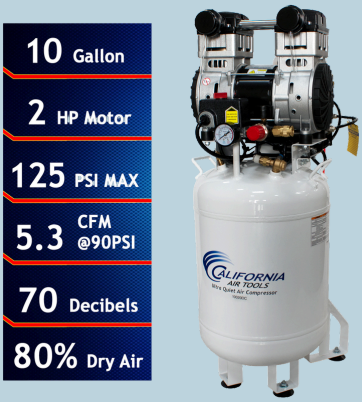


SPECIFICATION SHEET

Model: 10020DC

PRODUCT OVERVIEW

The CALIFORNIA AIR TOOLS 10020DC **Ultra Quiet** & Oil-Free 10 Gallon Air Compressor is designed to be one of the quietest 2.0 horse power air compressors in the industry having only 70 decibels of sound.

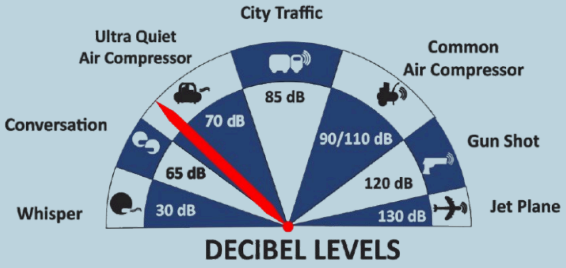

FEATURES

- The CALIFORNIA AIR TOOLS 10020DC Ultra Quiet & Oil-Free 10 Gallon Air Compressor is designed to be one of the quietest 2.0 horse power air compressors in the industry having only 70 decibels of sound.
- The powerful 2.0 HP motor operates at only 1680 RPM creating less noise, vibration and creating less wear. The Oil-Free Dual Piston Pump System is engineered for longevity, high performance and durability.
- The SP-9421 Motor/Pump is tested for a minimum pump life of 3000 hours before service. 30% more life before repair. The large 10.0 gallon steel air tank is only 91 lbs.





BENEFITS

The 80% Air Dryer is specially designed to remove the water vapor from the air to protect sensitive tools and machinery. To dry the air from the air compressor an Aftercooler and Dryer are utilized.

The aftercooler is a heat exchanger for cooling the discharge air from the air compressor. The water vapor from the compressed air is condensed into liquid form and pushed into the 80% Air Dryer. This air compressor is ideal for anyone working inside (office, shop, store, warehouse or home) where noise is a major issue.

SPECIFICATIONS

Specification	Details
Material	Alloy Steel
Color	White
Weight	91 Pounds
Height	35 inches
Item Dimensions L x W x H	16"L x 23"W x 35"H
Capacity	10 Gallons
Maximum Current	14.0 Amps
Voltage	110 Volts
Noise Level	70 dB
Horsepower	2.0 Hp
CFM 40 PSI	6.40
CFM 90 PSI	5.30

FEATURES

1. **Ultra Quiet** – Only 70 decibels
2. Oil-Free Pump – Cleaner air for better tool operation.
3. Less maintenance and Costs.
4. Two pressure control gauges
5. One – Female industrial “Push to Connect” quick connector (1/4″ NPT)
6. Thermal Overload Protector
7. 125 PSI Maximum Pressure
8. Kick On Pressure 95 PSI – Kick Off Pressure 125 PSI
9. 110v / 60 Hz
10. Low Amp Draw – Only 14.0 Amps
11. Tank fill rate from empty to full – 130 Seconds
12. Recovery time from 95 PSI to 125 PSI – 40 Seconds
13. Duty Cycle – 70/30
14. Maximum continuous running 30-60 min. (Depending PSI & CFM)
15. L (16″) x W (23″) x H (35″)
16. 91 pounds
17. Non-ASME Air Tank
18. 80% Air Dryer – Includes Activated Alumina desiccant with a 4000 hour life.

19. Activated Alumina is used in air prepurification (due to it’s high water
20. and carbon dioxide adsorption capacity) and adsorption of sulphur
21. compounds.
22. Aftercooler (condenser)
23. Commercial Use: Refer to State & City Codes
24. 1 Year Limited Warranty
25. Assembled in USA with global components

Product Overview:

[California Air Tools 10020DC Website]

COMPATIBLE ACCESSORIES

- 16 Piece Air Hose & Air Tool Accessory Kit (CAT-376)
- California Air Tools Hybrider Flex 1/4in 25 Foot Hybrid Air Hose
- 8mm PTFE Black Hose Tubing (10 feet long) to connect to Automatic Drain Valve
- EZ2321ADL Automatic Drain Valve Long Extension Kit (110v 60 hz)



Part Number	CAT-10020DC
UPC	743369710257
Shipping Dimensions	30”L x 30"W x 43"H
Shipping Weight	130 lbs
Shipping Class	85
Ship Type	LTL
Cage Code	7VRJ0
HTSUS	8414.80.1685
Country of Origin	MEXICO

CALIFORNIA AIR TOOLS | 8560 Siempre Viva Rd, San Diego, CA 92154, USA | (866) 409-4581 | info@californiaairtools.com