Category: Contractor Grade Air Compressor
UPC: 850004451694

20 Gallon
2 HP Motor
125 PSI MAX
5.0 CFM @90PSI
77 Decibels




SPECIFICATION SHEET

Model: 20020CR

PRODUCT OVERVIEW

The CALIFORNIA AIR TOOLS 20020CR Ultra Quiet & Oil-Free Continuous (100% Duty Cycle) 2.0 Hp Air Compressor is designed to be one of the quietest air compressors in the industry having only 77 decibels of sound.

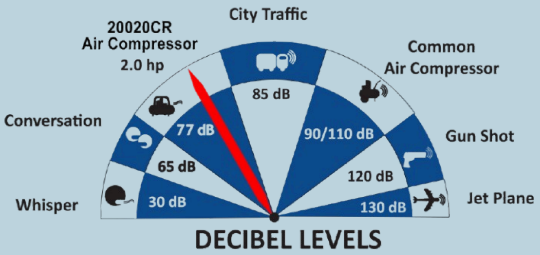

FEATURES

- The Powerful “New” 200CR, 2.0 hp motor/pump operates at only 1700 RPM creating less noise and less wear.
- CONTINUOUS RUNNING UP TO 8 HOURS AT 90 PSI AND 12 HOURS AT 40 PSI OR BELOW.
- The Oil-Free Dual Head Piston Pump System with Teflon Coated Piston Rings is engineered for high performance and durability.





BENEFITS

The CAT-20020CR Air Compressor has a Oil-Free Piston pump designed to have a life cycle before wear of 5000 hours of usage. Wear parts can be a piston ring, cylinder ring or reed valve.

The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

The large 20-gallon steel air tank with no flat wheels is just the right size for a shop, warehouse, or factory.

Designed for people looking for Oil-Free Continuous Air Flow with at Least 30% Less Noise!

SPECIFICATIONS

Specification	Details
Material	Stainless Steel
Color	Silver
Weight	114 Pounds
Heigh	45 inches
Item Dimensions L x W x H	20"L x 20"W x 45"H
Capacity	20 Gallons
Maximum Current	14 Amps
Voltage	110 Volts
Noise Level	77 dB
Horsepower	2.0 Hp
CFM 40 PSI	6.50
CFM 90 PSI	5.00

FEATURES

1. **Ultra Quiet – Only 77 decibels**
2. Oil-Free Pump – Cleaner air for better tool operation.
3. Less maintenance and Costs.
4. Two pressure control gauges
5. Two – Female industrial “Push to Connect” quick connectors
6. Condor Pressure Switch
7. Thermal Overload Protector
8. 125 PSI Maximum Pressure
9. 110 Volt / 60 Hertz / Single Phase
10. Amp Draw – 14 Amps
11. Power Requirements:
12. Dedicated 15-amp outlet.
13. 3000-Watt (running) Generator

14. Extension Cord: 14-gauge 100ft cord
15. GFCI – Ok
16. Maximum Operating (ambient)
17. Temperatures: 0 to 50°C (32 to 122°F)
18. Time to fill tank from empty to full – 4.00 minutes
19. Recovery time from 90 PSI to 125 PSI – 40 Seconds
20. Up to 8 hours of continuous running at 90 PSI
21. 20 Gal. Steel Air Tank * L (20″) x W/D (20″) x H (45″),
22. Weight: 114 lbs * Non-ASME Air Tank
23. Commercial Use: Refer to State & City Codes
24. 1 Year Limited Warranty
25. Motor-Pump Made in USA
26. Assembled in USA with global components

Product Overview:

[California Air Tools 20020CR Website]

COMPATIBLE ACCESSORIES

- 16 Piece Air Hose & Air Tool Accessory Kit (CAT-376)
- California Air Tools Hybrider Flex 1/4in 25 Foot Hybrid Air Hose
- 317 Water (moisture) & Oil Separator Air Filter 1/4 NPT



Part Number	CAT- 20020CR
UPC	850004451694
Shipping Dimensions	21"L x 21"W x 50"H
Shipping Weight	133 lbs
Shipping Class	85
Ship Type	SMALL PARCEL
Cage Code	7VRJ0
HTSUS	8414.80.1685
Country of Origin	USA