Category: Contractor Grade Stationary Air Compressor
UPC: 743369720065

20 Gallon
4 HP Motor
125 PSI MAX
10.6 CFM @90PSI
75 Decibels




SPECIFICATION SHEET

Model: 20040CAD

PRODUCT OVERVIEW

The CALIFORNIA AIR TOOLS 20040CAD **Ultra Quiet** & Oil-Free Air Compressor, with Automatic Drain Valve (220v 60hz), is designed to be one of the quietest 4.0 Hp air compressors in the industry having only 75 decibels of sound.

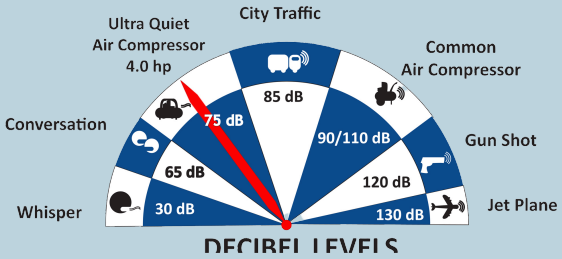

FEATURES

- The Powerful Twin 2.0 HP (SP-9421-22060 220volt 60hz) motor pumps operate at only 1680 RPM creating less noise and less wear.
- The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times.*
- The Oil-Free Dual Piston Pump System is engineered for high performance and durability.





BENEFITS

The CAT-20040CAD Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours. The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

The large 20 Gallon Steel Air Tank is just the right size for shop or garage. EZ-1-2321 Auto Drain Valve Factory Installed. The California Air Tools EZ-1 Automatic Drain Valve has been designed to eliminate manually draining your air compressor air tank.

The manually set timer allows you to set the time for both the frequency and duration of the draining process. (Factory Pre-Set). Designed for the person looking for Power, Air Flow and Less Service with at Least 30% Less Noise!

SPECIFICATIONS

Specification	Details
Material	Alloy Steel
Color	White
Weight	148 Pounds
Height	28 inches
Item Dimensions L x W x H	37.5"L x 15"W x 28"H
Capacity	20 Gallons
Maximum Current	14 Amps
Voltage	220 Volts
Noise Level	75 dB
Horsepower	4.0 Hp
CFM 40 PSI	12.80
CFM 90 PSI	10.60

FEATURES

1. **Ultra Quiet – Only 75 decibels**
2. Oil-Free Pump – Cleaner air for better tool operation. Less maintenance and Costs.
3. Two pressure control gauges
4. Output Air Pressure Regulator (0-125 PSI)
5. One – Female Industrial “Push to Connect” quick connector (1/4″ NPT)
6. Condor Pressure Switch
7. Easy Start Valves (2) – For Less Starting Amperage
8. Thermal Overload Protector
9. Working Pressure 90-125 PSI (+/-5 PSI). Adjustable up to 105 PSI Kick-On; 130 PSI Kick-Off maximum.
10. 220 Volt / 60 Hertz / Single Phase (No 208 Volts – if necessary, obtain 208 to 220 voltage booster)
11. Low Amp Draw – 14 Amps
12. Time to fill tank from empty to full – 150 Seconds
13. Recovery time from 95 PSI to 125 PSI – 40 Seconds


14. Duty Cycle – 70/30*
15. Less heat which dissipates more efficiently
16. 20 Gal. Steel AirTank – pounds and easy to move around.
17. EZ-1-2301 Auto Drain Valve Factoy Installed
18. The California Air Tools EZ-1 Automatic Drain Valve has been designed to eliminate manually draining your air compressor air tank.
19. L (37.5″) x W (15″) x H (28″),
20. Weight: 148 lbs
21. 1 Year Limited Warranty
22. Comes complete (4) Air Filters
23. Plug Type: Nema 6-15P (fits Nema 6-15R or 6-20R receptacle)
24. Commercial Use: Refer to State & City Codes
25. Non-ASME Air Tank
26. Assembled in USA with Global Components

Product Overview:

[California Air Tools 20040CAD Website]

COMPATIBLE ACCESSORIES 16 Piece Air Hose & Air Tool Accessory Kit (CAT-376)

- California Air Tools Hybrider Flex 1/4in 25 Foot Hybrid Air Hose
- 317 Water (moisture) & Oil Separator Air Filter 1/4″ NPT

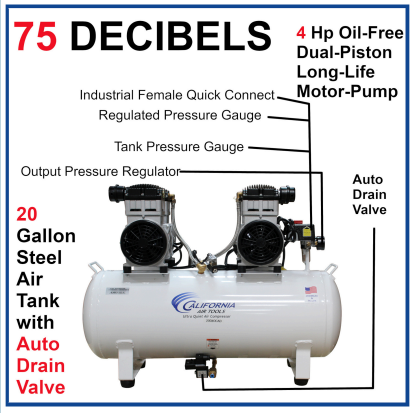

Part Number	CAT-20040CAD
UPC	743369720065
Shipping Dimensions	48”L x 40"W x 38"H
Shipping Weight	208 lbs
Shipping Class	85
Ship Type	Freight
Cage Code	7VRJ0
HTSUS	8414.80.1685
Country of Origin	MEXICO