Category: Contractor Grade Stationary Air Compressor
UPC: 850004451120

20 Gallon
4 HP Motor
125 PSI MAX
10.6 CFM @90PSI
65 Decibels




SPECIFICATION SHEET

Model: 20040SPCAD

PRODUCT OVERVIEW

The CALIFORNIA AIR TOOLS 20040SPCAD Ultra Quiet & Oil-Free Air Compressor in Sound Proof Cabinet is designed to be one of the quietest 4.0 Hp air compressors in the industry having only 65 decibels of sound.

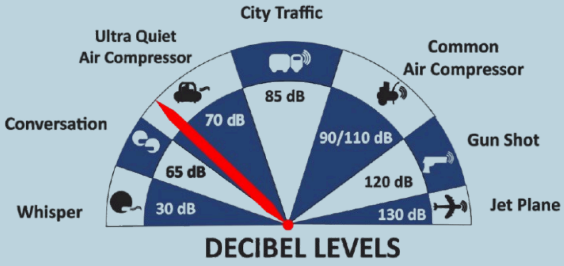

FEATURES

- The CALIFORNIA AIR TOOLS 20040SPCAD Ultra Quiet & Oil-Free Air Compressor in Sound Proof Cabinet is designed to be one of the quietest 4.0 Hp air compressors in the industry having only 65 decibels of sound.
- The Powerful Twin 2.0 HP motors operates at only 1680 RPM creating less noise, vibration and wear.
- The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times.*
- The Oil-Free Dual Piston Pump System is engineered for high performance, durability and less maintenance.





BENEFITS

The CAT-20040SPCAD Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours. The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump). The Easy Start Valve feature allows for a easier start up using less starting amps. The Easy Start Valve releases a small amount of air from the pump at start up to produce a no-load condition allowing the motor to spin freely.

The large 20 Gallon Steel air tank and Soundproof Cabinet is 230 lbs. The sound proof cabinet has two latching doors that allows for easy access to the air compressor and components. The three cabinet exhaust fans are used to remove air from the cabinet to reduce heat and provide a cooler working condition for the air compressor.

The 4 caster wheels makes moving the air compressor from location to location very easy. EZ-1-2321 Auto Drain Valve Factory Installed. The California Air Tools EZ-1 Automatic Drain Valve has been designed to eliminate manually draining your air compressor air tank. The manually set timer allows you to set the time for both the frequency and duration of the draining process. (Factory Pre-Set). Designed for the person looking for Power, Air Flow, Less Service and Maintenance with at Least 30% Less Noise!

SPECIFICATIONS

Specification	Details
Material	Alloy Steel
Color	White
Weight	230 Pounds
Height	33 inches
Item Dimensions L x W x H	19"L x 38"W x 33"H
Capacity	20 Gallons
Maximum Current	14 Amps
Voltage	220 Volts
Noise Level	65 dB
Horsepower	4.0 Hp
CFM 40 PSI	12.80
CFM 90 PSI	10.60

FEATURES

1. **Ultra Quiet** – Only 65 decibels
2. Oil-Free Pump – Cleaner air for better tool operation.
3. Less maintenance and Costs.
4. Two pressure control gauges
5. One – Female industrial “Push to Connect” quick connector
6. Easy Start Valve – For Less Starting Amperage
7. Condor Pressure Switch
8. Thermal Overload Protector


9. 125 PSI Maximum Pressure
10. 220v / 60 hz / Single Phase – (No 208 Volts – if necessary, obtain 208 to 220 voltage booster)
11. Low Amp Draw – 14 Amps
12. Time to fill tank from empty to full – 150 Seconds
13. Recovery time from 95 PSI to 125 PSI – 40 Seconds
14. Duty Cycle – 70/30*
15. Less heat which dissipates more efficiently
16. 20 Gal. Steel Air Tank With Sound Proof Cabinet and Swivel Caster wheels
17. L (19″) x W (38″) x H (33″)
18. Weight: 230 lbs
19. Comes complete (4) Air Filters
20. Plug Type: Nema 6-15P (fits Nema 6-15R or 6-20R receptacle)
21. EZ-1-2321 Auto Drain Valve Factory Installed
22. 1 Year Limited Warranty
23. Commercial Use: Refer to State & City Codes
24. Non-ASME Air Tank
25. Assembled in USA with global components

Product Overview:

[California Air Tools 20040SPCAD Website]

COMPATIBLE ACCESSORIES

- 16 Piece Air Hose & Air Tool Accessory Kit (CAT-376)
- California Air Tools Hybrider Flex 1/4in 25 Foot Hybrid Air Hose
- 317 Water (moisture) & Oil Separator Air Filter 1/4″ NPT

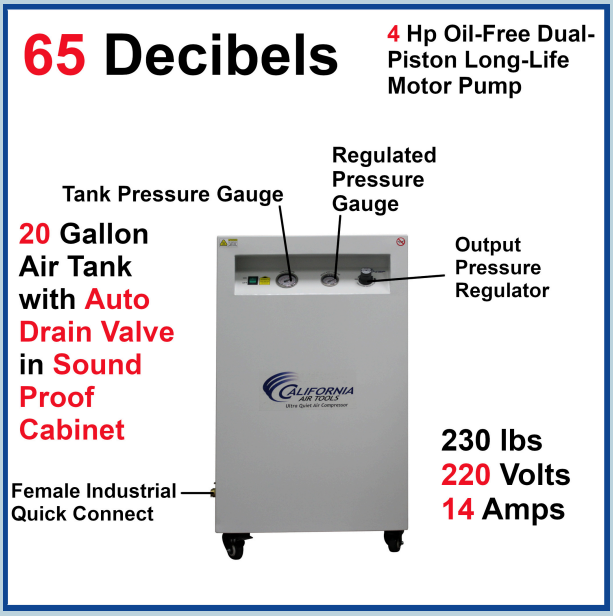

Part Number	CAT-20040SPCAD
UPC	850004451120
Shipping Dimensions	48”L x 40"W x 45"H
Shipping Weight	335 lbs
Shipping Class	85
Ship Type	LTL
Cage Code	7VRJ0
HTSUS	8414.80.1685
Country of Origin	MEXICO

CALIFORNIA AIR TOOLS | 8560 Siempre Viva Rd, San Diego, CA 92154, USA | (866) 409-4581 | info@californiaairtools.com