Category: Contractor Grade Stationary Air Compressor
UPC: 850004451830




SPECIFICATION SHEET

Model: 20060CAD

PRODUCT OVERVIEW

The CALIFORNIA AIR TOOLS 20060CAD Ultra Quiet & Oil-Free Air Compressor is designed to be one of the quietest 6.0 Hp air compressors in the industry having only 78 decibels of sound.

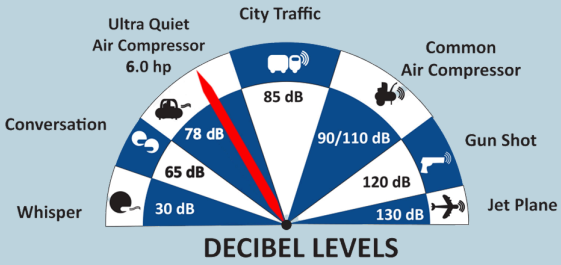

FEATURES

- The Powerful (3) 2.0 HP (SP-9421-22060) motors operate at only 1680 RPM creating less noise and less wear.
- The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times.
- The Oil-Free Dual Piston Pump System is engineered for high performance and durability.





BENEFITS

The CAT-20060CAD Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours compared to other comparable air compressors with life cycles of 1500 hours or less.

The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump). The large 20 Gallon Steel Air Tank is just the right size for shop or garage. The EZ-1-2301 Automatic Drain Valve is Factory installed. The California Air Tools EZ-1 Automatic Drain Valve has been designed to reduce the moisture (water) in the air tank. Draining the air tank reduces the amount of water going out to your air tools or machinery. Designed for the person looking for Power, Air Flow and Less Service with at Least 30% Less Noise!

SPECIFICATIONS

Specification	Details
Material	Stainless Steel
Color	White
Weight	178 Pounds
Height	28 inches
Item Dimensions L x W x H	40"L x 15"W x 28"H
Capacity	20 Gallons
Maximum Current	24 Amps
Voltage	220 Volts
Noise Level	78 dB
Horsepower	6.0 Hp
CFM 40 PSI	19.80
CFM 90 PSI	14.60

FEATURES

1. Ultra Quiet – Only 78 decibels
2. Oil-Free Pump – Cleaner air for better tool operation.
3. Less maintenance and Costs.
4. One tank pressure gauge
5. 1/2″ NPT female air port
6. NOTE: No output pressure regulator, quick connector or air hose included**
7. Condor Pressure Switch
8. Thermal Overload Protector
9. 125 PSI Maximum Pressure
10. 220 Volt / 60 Hertz / Single Phase (No 208 Volts; acceptable range 215VAC to 250VAC. As necessary, obtain 208 to 230 voltage booster).
11. Low Amp Draw – 24 Amps
12. 30 Amp Breaker Required
13. Time to fill tank from empty to full – 70 Seconds
14. Recovery time from 95 PSI to 125 PSI – 20 Seconds

15. Duty Cycle – 70/30*
16. Less heat which dissipates more efficiently
17. 20 Gal. Steel AirTank – 178 pounds and easy to move around.
18. L (40″) x W (15″) x H (28″)
19. Weight: 178 lbs
20. 1 Year Limited Warranty
21. EZ-1-2301 Auto Drain Valve Factoy Installed
22. Comes complete (6) Air Filters
23. Plug Type: Nema L6-30P
24. Cord Length: 7ft
25. Commercial Use: Refer to State & City Codes
26. Non-ASME Air Tank
27. Assembled in USA with Global Components

Product Overview:

[California Air Tools 20060CAD Website]

COMPATIBLE ACCESSORIES

- 16 Piece Air Hose & Air Tool Accessory Kit (CAT-376)
- California Air Tools Hybrider Flex 1/4in 25 Foot Hybrid Air Hose
- 317 Water (moisture) & Oil Separator Air Filter 1/4″ NPT



Part Number	CAT-20060CAD
UPC	850004451830
Shipping Dimensions	48”L x 40"W x 38"H
Shipping Weight	246 lbs
Shipping Class	85
Ship Type	LTL
Cage Code	7VRJ0
HTSUS	8414.80.1685
Country of Origin	MEXICO