Category: Contractor Grade Stationary Air Compressor
UPC: 850053943416

80 Gallon
6.0 HP Motor
120 PSI MAX
16.8 CFM @90PSI
76 Decibels
220v 60hz 1-phase




SPECIFICATION SHEET

Model: 80060C

PRODUCT OVERVIEW

The CALIFORNIA AIR TOOLS 80060C **Ultra Quiet** & Oil-Free 80 Gallon Air Compressor is designed to be one of the quietest 6.0 Hp air compressors in the industry having only 76 decibels of sound.

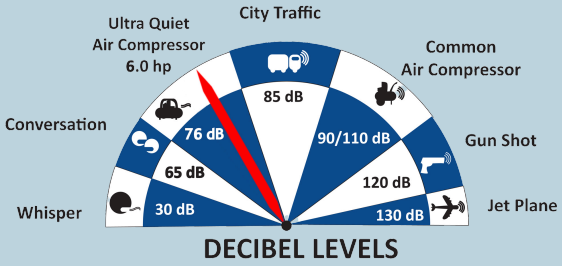

DECIBEL LEVELS

FEATURES

- The Powerful Twin OLF2800 3.0 Hp motor pumps operate at only 1680 RPM creating less noise and less wear. The Oil-Free OLF motor/pump system is engineered for high performance and durability. The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).
- The large 80 Gallon ASME Certified Steel Air Tank is ideal for large shops and garages.
- Designed for the person looking for Power, Air Flow and Less Service with at Least 30% Less Noise!





BENEFITS

1. **Pressure Regulator NOT included – two available options:**

120 PSI Complete Pressure Regulator Assembly w/Gauge and Fittings (1/4″ NPT Quick-Connect Output) available separately for purchase

125 PSI Pressure Regulator (1/2″ NPT Output) with Micro Mist separator available separately for purchase

Dial Gauge available separately

— Additional adapters may be required depending on setup/configuration.

2. **Optional Refrigerated 98% Air Dryer, RD-91503, 220v 60hz (click here).**
3. **Automatic Drain Valve — EZ2321ADL Automatic Drain Valve Long Extension Kit (110v 60 hz)**
4. **Replacement Piston Seal 4-Pack (replace every 2000 operating hours)**

SPECIFICATIONS

Specification	Details
Material	Alloy Steel
Color	Silver
Weight	360 Pounds
Height	61.5 inches
Item Dimensions L x W x H	33"L x 23.5"W x 61.5"H
Capacity	80 Gallons
Maximum Current	24 Amps
Voltage	220 Volts
Noise Level	76 dB
Horsepower	6.0 Hp
CFM 40 PSI	20.0
CFM 90 PSI	16.80

FEATURES

1. **Ultra Quiet** – Only 76 decibels
2. Oil-Free Pump – Cleaner air for better tool operation.
3. Less maintenance and Costs.
4. Main tank pressure gauge
5. Female air output port with ball valve (1/2″ NPT)
6. No output pressure regulator, quick connector or air hose included**
7. Condor Pressure Switch
8. Thermal Overload Protector
9. 120 PSI Maximum Pressure** (maximum output air flow pressure 90 PSI)
10. 208/220 Volt / 60 Hertz / 1-Phase – (200v-250v range)
11. Amp Draw – 24 Amps
12. Time to fill tank from empty to full – 3:56 Minutes
13. Recovery time from 90 PSI to 120 PSI – 57 Seconds

14. Duty Cycle – 70/30***
15. Less heat which dissipates more efficiently
16. 80 Gal. Steel ASME Air Tank
17. L (33.0″) x W/D (23.5″) x H (61.5″)
18. 360 lbs
19. Comes complete (8) Air Filters and (8) Air In-Take Tubes
20. Plug Type: Nema L6-30P (fits Nema L6-30R outlet /r receptacle)
21. Power Cord Length: 7ft
22. Manual Ball Drain Valve
23. ASME Certified for Commercial Use
24. 1 Year Limited Warranty
25. Commercial Use: Refer to State & City Codes
26. Assembled in Mexico with global components
27. NOTE: Pressure Regulator NOT included (suggested option hardware below)**

Product Overview:

[California Air Tools 80060C Website]

COMPATIBLE ACCESSORIES

- 16 Piece Air Hose & Air Tool Accessory Kit (CAT-376)
- California Air Tools Hybrider Flex 1/4in 25 Foot Hybrid Air Hose
- 317 Water (moisture) & Oil Separator Air Filter 1/4″ NPT



Part Number	CAT-80060C
UPC	850053943416
Shipping Dimensions	48”L x 40"W x 77"H
Shipping Weight	321 lbs
Shipping Class	85
Ship Type	LTL
Cage Code	7VRJ0
HTSUS	8414.80.1685
Country of Origin	MEXICO